


The Xyron Pro1255 Dual Purpose A3/A4 Machine

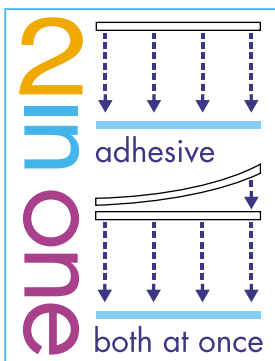

The Fastest Growing Cold Lamination and Adhesive Application System in the World.

- Clean, simple, easy to use
- For client presentation, mock-ups and POP material
- Range of adhesives - Re-positional or permanent
- Lamination top, adhesive back - Re-positional or permanent

The Xyron Pro1255

Whether applying adhesive in the studio for client presentation, mock-ups, story - boards or point of purchase material, the Xyron Pro1255 instantly applies adhesive without heat or electricity. Simply feed an item in, turn the handle and trim. No smell, no mess and no waiting. The patented drop-in cartridge system allows users to quickly switch between applications, making the Xyron Pro1255 one of the most versatile machines available. Its improved adhesive formula, coupled with higher-pressure rollers, improves both transfer and bonding quality.

Product Descriptions

AT1256-100 Re-positional Mounting Adhesive: Allows you to re-position your item over and over again. It will allow easy removal from mount-boards, paper, walls and most other surfaces.*

AT1251-100 Standard Mounting Adhesive: A strong adhesive that creates a permanent bond on most surfaces.

AT1255-100 High Tack Mounting Adhesive: A powerful adhesive that instantly creates a permanent bond on most surfaces.


AT1254-100 Quick Tack Mounting Adhesive: A tough adhesive that creates a permanent bond on most surfaces. Good for use with colour laser printers.

LAT1251-100 Combination One Side Lamination/One Side Permanent Adhesive: Xyron's general use laminate on the top surface and a permanent adhesive on the reverse.

LAT1256-100 Combination One Side Lamination/One Side Re-positional Adhesive: Xyron's general use laminate on the top surface and a re-positional adhesive on the reverse.*



Key



Specifications

Product Code: 23651

Footprint: 38 cm L x 48.8 cm W x 45.5 cm

Document Width (Max): 29.8 cm

Weight: Approximately 8.6 kg

Document Length (Max): 30.5 m

Packaged Weight: Approx 9 kg

Power Source: None

Document Thickness (Max): 3.2 mm

Cutter: Removable, replaceable cutter

1255 CARTRIDGES

Esselte (Part Number)	Alpha (Part Number)	Product Description	Material Length	Material Width	Laminate & Adhesive Combination thickness (Per Side)	Mounting Adhesive Thickness	Adhesive pH	Mounting Adhesive Strength (1:10; 10 High)	PAT Approved
Adhesive Application Cartridges (AT Series):									
23621	AT 1251-100	Adhesive Application - Permanent High Tack	30.5 m	29.8 cm	N/A	15.2 mic	5.0 - 7.0	10	Yes
23622	AT 1254-100	Adhesive Application - Permanent Quick Tack	30.5 m	29.8 cm	N/A	15.2 mic	5.0 - 7.0	9	Yes
23623	AT 1255-100	Adhesive Application - Standard	30.5 m	29.8 cm	N/A	15.2 mic	5.0 - 7.0	8	Yes
23624	AT 1256-100	Adhesive Application - Re-positional	30.5 m	29.8 cm	N/A	27.9 mic	Acid Free	~	Yes
Combination One Side Lamination/One Side Adhesive Application (LAT Series):									
23625	LAT 1251-100	1 Side Laminate/1 Side Adhesive Application General Use Laminate/High Tack Adhesive	30.5 m	29.8 cm	62.5 mic	15.2 mic	Lam: 6.0 - 6.4 Adh: 5.0 - 7.0	10	Yes
23626	LAT 1256-100	1 Side Laminate/1 Side Adhesive Application General Use Laminate/Re-positional	30.5 m	29.8 cm	62.5 mic	27.9 mic	Lam 6.0 - 6.4 Adh: Acid Free	~	Yes

* Please test before each application.



www.mattonbutiken.se

08-588 000 00